


65%-85% Transparency Rate, Vivid Display

Indoor Transparent Display

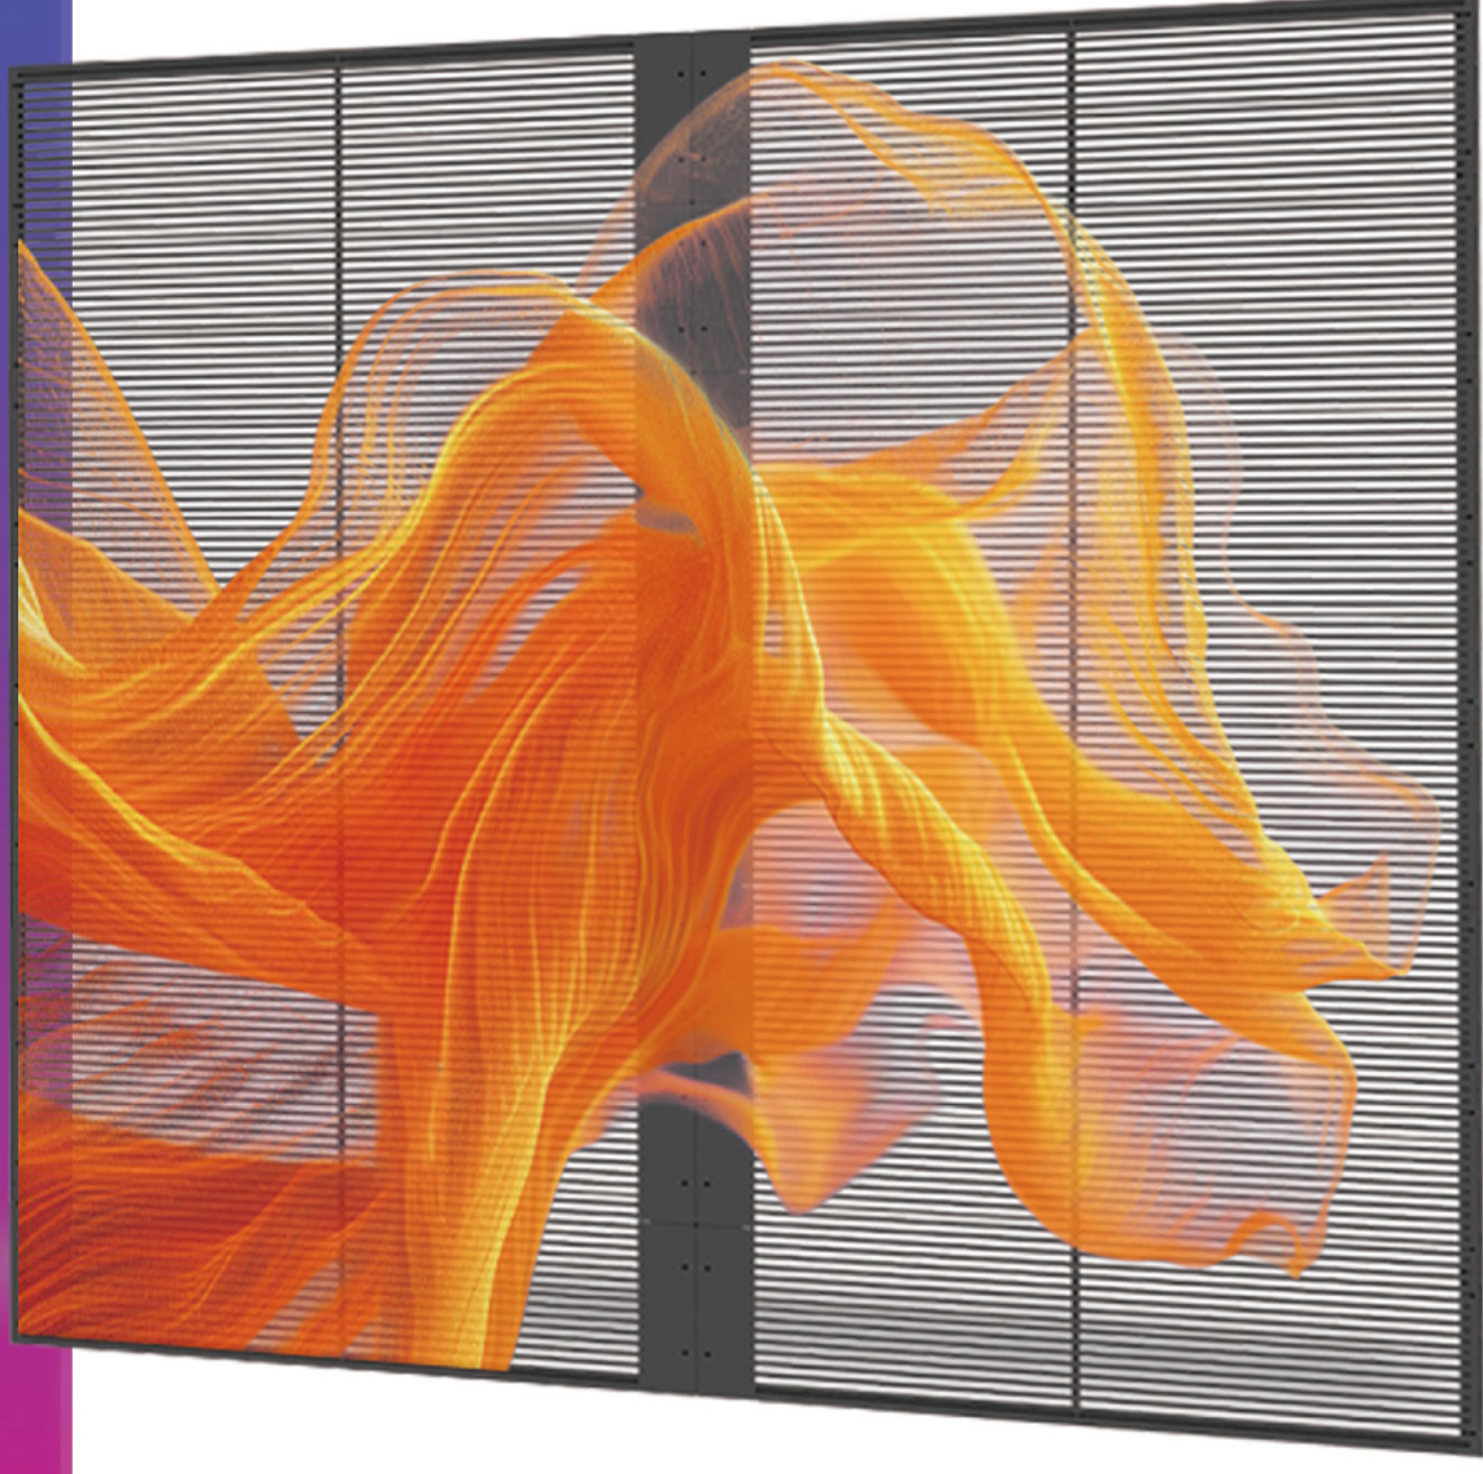

Indoor Transparent Display

WENGO Z-TUROUGH Series-Indoor Transparent Display

Light transmission, light and thin, transparent, high definition, easy installation etc.

1000*1000mm, 1000*500mm, 500*500mm cabinet.

65%-85% transparation rate with hollow type design.

Application: shopping mall, glass curtain wall, ceiling, oberservation elevator, store window, bar etc.



High transparation



Good heat dissipation



Light and thin



Super brightness



Customize



Front and rear maintenance



High refresh rate



Wide viewing angle


Product Overview

Can splice to different shape and size with standad 1000X500mm cabinet.

Perfect vision with instinct image and no image compression , easy installation.

Top choice of ceativity vitrine LED Display.

SKETCH:1000*500mm

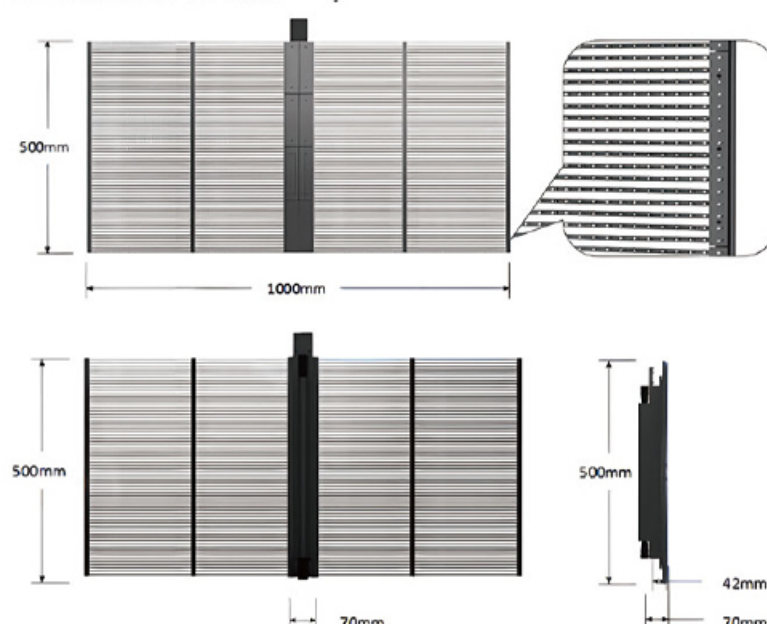

Product characteristics

More than 75% transparency rate.

1080P resolution ,5000:1 contrast,3840Hz refresh rate.

High color gray level,adjustable brightness.

Seamless splicing:easy installation and maintenance.

Ultra-thin cabinet only 12kg m²

Wireless connectivity to smartphone and tablet PC.



Case picture



Product Parameter

Model	P2.6-5.2	P2.8-5.6	P2.9-6.2	P3.9-7.8	P7.8-7.8
Pixel pitch	2.653	2.856	2.856	3.91	7.81
LED type	SMD1921	SMD1921	SMD1921	SMD1921	SMD1921
Beam angel(Hor"/Ver")	160°	160°	160°	160°	160°
Pixel composition	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Pixel density(pixels/ m ²)	73728	61952	53760	32768	16384
Scan mode	1/12	1/11	1/14	1/8	1/4
Color gray leve(Bit)	16	16	16	16	16
Brightness(nits)	800	800	1000	800	800
Contrast	1/10000	1/10000	1/10000	1/10000	1/10000
Replacement frequency	60FPS	60FPS	60FPS	60FPS	60FPS
Refresh rate (Hz)	3840	3840	3840	3840	3840
Input voltage	DC5V	DC5V	DC5V	DC5V	DC5V
Max power consumption	600W	600W	400W	600W	600W
Weight	12kg/m ²	12kg/m ²	12kg/m ²	12kg/m ²	12kg/m ²
Operation life	>100,000H	>100,000H	>100,000H	>100,000H	>100,000H
IP rating	IP43	IP43	IP43	IP43	IP43
Fire rating	V0	V0	V0	V0	V0
Module pixel	192*24	176*22	42*80	128*16	64*16
Module size	500mm*125mm	500mm*125mm	500mm*125mm	500mm*125mm	500mm*125mm